

AGROS Rotary Tiller

Semi-large Size AR4000SC Series

- Premium-grade semi-large rotavator suitable for both paddy and dry fields, designed for tractors with 55–80 horsepower
- Main deck structure with a frame-type design for excellent strength and durability
- Low-resistance blade arrangement optimized to enhance soil flowability



AR4215SC




Specifications

Model	AR4195SC	AR4205SC	AR4215SC	AR4220SC
Overall Width (mm)	2210	2310	2355	2470
Overall Height (mm)	1170			
Overall Length (mm)	975			
Working Width (mm)	1930	2040	2080	2195
Working Depth (mm)	120~150			
Number of Flanges (EA)	8	8	8	9
Number of Blades (EA)	48	48	48	54
Tillage Blade Type	C Type			
Blade Shaft Speed (rpm)	156,175,196, 219 / 540 rpm			
Required Power (hp)	55~60	60~70	70~75	75~80
Height of PTO Shaft (mm)	665			
Weight (kg)	595	600	610	635



- Up to 100 HP multi-speed gearbox (Oil gauge installed as standard)

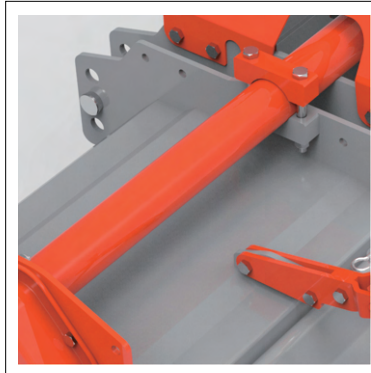


- Main deck with frame structure with high-strength double BEAM




- Spring tension and rolling type back cover (Using high tensile steel plate)



- Powerful special Geared side drive of material
- Perfect gear fixation using special grooved nuts

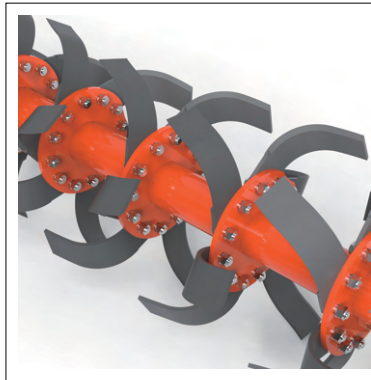


- Blade with excellent low load and soil fluidity Arrangement
- Special Material blade (Tilling blade) and blade flange (Tillage blade type: C)

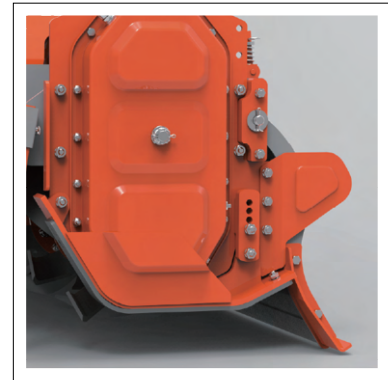

- Economical and convenient replacement type Auxiliary skid
- Use of highly durable spring steel



- Special Front mud splatter prevention rubber plate with good material flexibility
- Detachable type for easy attachment and detachment

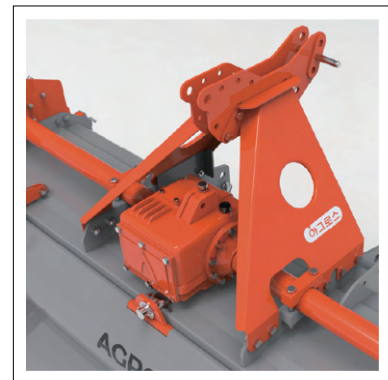

- Versatile with sturdy structure and various mounting holes top master

AGROS

52, Seobyeon 1-gil, Miyang-myeon, Anseong-si
Gyeonggi-do, Republic of Korea

Tel: +82-31-677-7311, Fax: +82-31-677-5421

E-mail : agros@agros.co.kr

www.agros.co.kr