

AGROS Rotary Tiller


Large Size AR5000SC Series



- Premium-grade large rotavator suitable for both paddy and dry fields, designed for tractors with 90–110 horsepower
- Main deck structure with a frame-type design for excellent strength and durability
- Low-resistance blade arrangement optimized to enhance soil flowability




AR5240SC

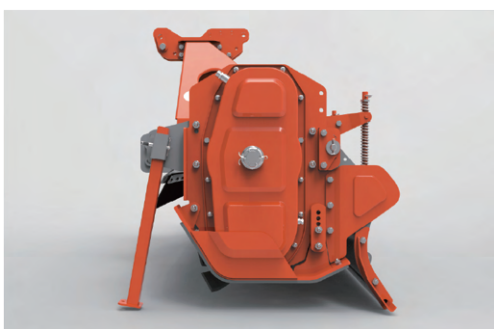


Specifications

Model	AR5230SC	AR5240SC
Overall Width (mm)	2585	2650
Overall Height (mm)	1250	
Overall Length (mm)	1040	
Working Width (mm)	2290	2350
Working Depth (mm)	120~150	
Number of Flanges (EA)	9	9
Number of Blades (EA)	54	54
Tillage Blade Type	C Type	
Blade Shaft Speed (rpm)	156,175,196,219 / 540 rpm	
Required Power (hp)	90~100	100~110
Height of PTO Shaft (mm)	735	
Weight (kg)	830	840

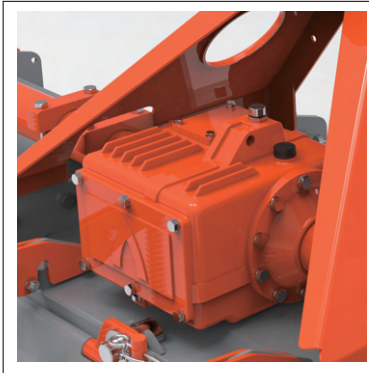

- Up to 150 HP multi-speed gearbox (Oil gauge installed as standard)

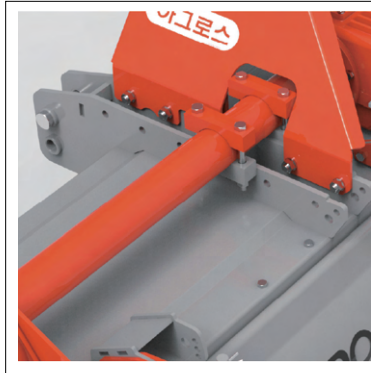


- Main deck with frame structure with high-strength double BEAM




- Spring tension and rolling type back cover (Using high tensile steel plate)
- The rear cover adjustment bracket can be moved and installed




- Powerful special Geared side drive of material
- Perfect gear fixation using special grooved nuts

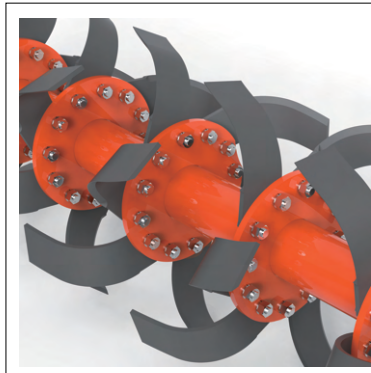


- Blade with excellent low load and soil fluidity Arrangement
- Special Material blade (Tilling blade) and blade flange (Tillage blade type: C)

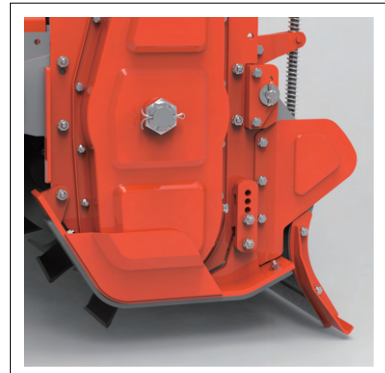

- Economical and convenient replacement type Auxiliary skid
- Use of highly durable spring steel

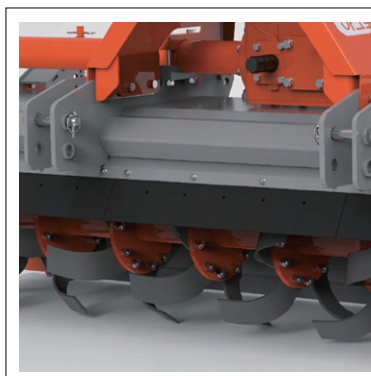

- Special Front mud splatter prevention rubber plate with good material flexibility
- Detachable type for easy attachment and detachment

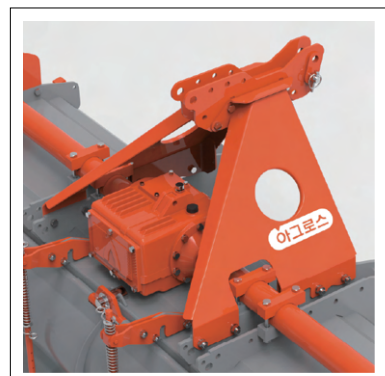

- Versatile with sturdy structure and various mounting holes top master

AGROS

52, Seobyeon 1-gil, Miyang-myeon, Anseong-si Gyeonggi-do, Republic of Korea

Tel: +82-31-677-7311, Fax: +82-31-677-5421

E-mail : agros@agros.co.kr

www.agros.co.kr