

AGROS Rotary Tiller




Wide Type (for rice fields only) AR6000SC Series

- Wide rotary tillers suitable for both paddy and dry fields, designed for tractors with 70–150 horsepower
- Main deck structure with a frame-type design for excellent strength and durability
- Blade with excellent low load and soil fluidity Arrangement




AR6240SC

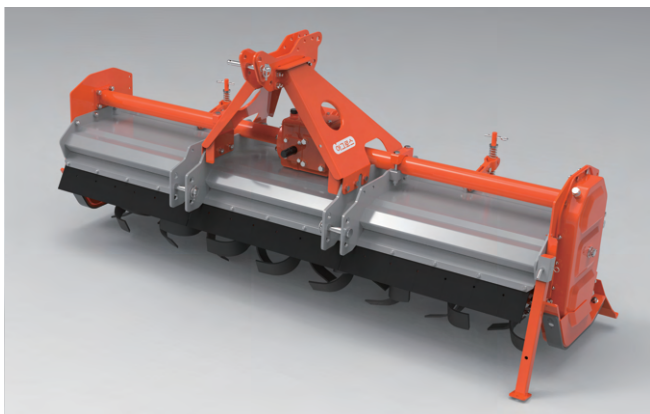


Specifications

Model	AR6240SC	AR6260SC	AR6280SC	AR6300SC
Overall Width (mm)	2360	2880	3080	3275
Overall Height (mm)	1160	1230		
Overall Length (mm)	915	940		
Working Width (mm)	2355	2660	2785	2980
Working Depth (mm)	100~130			
Number of Flanges (EA)	9	10	11	12
Number of Blades (EA)	54	60	66	72
Tillage Blade Type	C Type			
Blade Shaft Speed (rpm)	156,175,196, 219 / 540 rpm			
Required Power (hp)	70~85	85~100	100~120	120~150
Height of PTO Shaft (mm)	660	710		
Weight (kg)	670	800	840	875

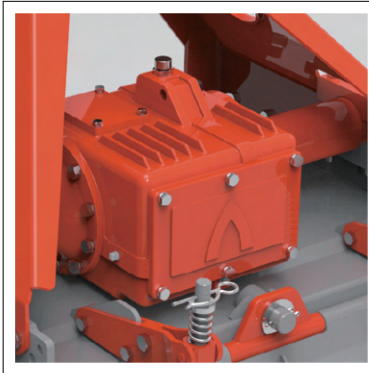

- Up to 100 HP (6240) and 150 HP (6260) gearboxes applied (Oil gauge installed as standard)

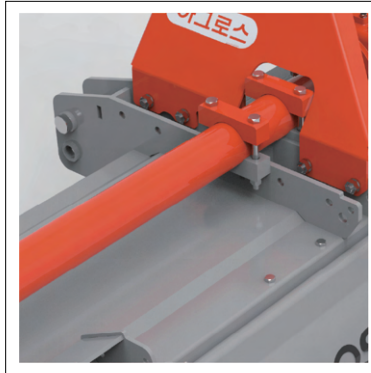


- Main deck with frame structure with high-strength double BEAM




- Spring tension and rolling type back cover (Using high tensile steel plate)
- The rear cover adjustment bracket can be moved and installed




- Powerful special Geared side drive of material
- Perfect gear fixation using special grooved nuts

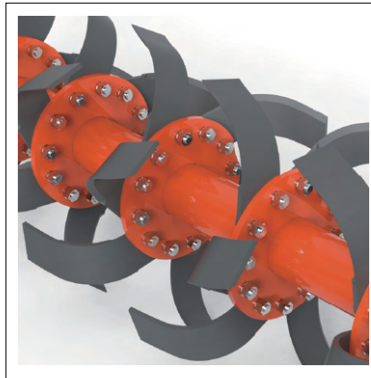


- Blade with excellent low load and soil fluidity Arrangement
- Applied a large-diameter pipe that excels in burying straw

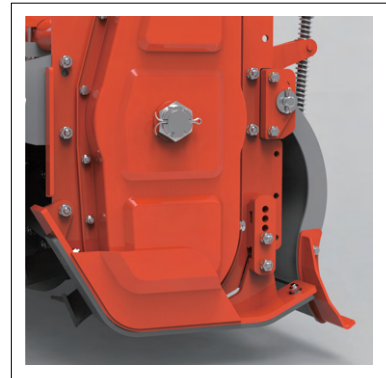

- Economical and convenient replacement type Auxiliary skid
- Use of highly durable spring steel

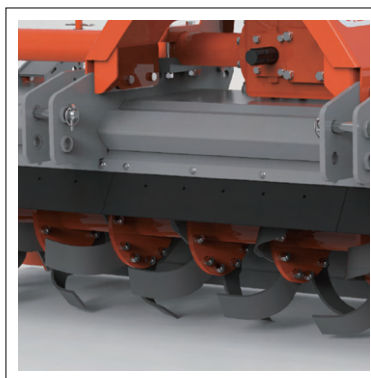

- Special Front mud splatter prevention rubber plate with good material flexibility
- Detachable type for easy attachment and detachment

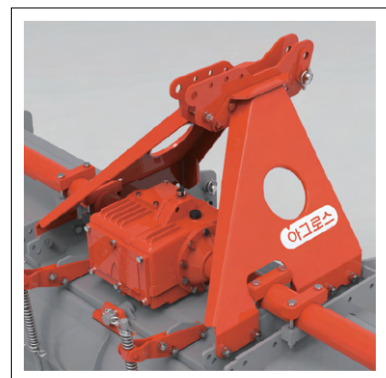

- Versatile with sturdy structure and various mounting holes top master

AGROS

52, Seobyeon 1-gil, Miyang-myeon, Anseong-si Gyeonggi-do, Republic of Korea

Tel: +82-31-677-7311, Fax: +82-31-677-5421

E-mail : agros@agros.co.kr

www.agros.co.kr