

# AGROS Rotary Tiller

## Extra Large Size AR7000HD Series

- Super-large rotary tillers suitable for both paddy and dry field operations, designed for tractors with 120–160 horsepower
- Main deck structure with a frame-type design for excellent strength and durability
- High-strength pipe and special material blade flange



AR7260HD




### Specifications


Model	AR7260HD	AR7280HD
Overall Width (mm)	2880	3075
Overall Height (mm)	1435	
Overall Length (mm)	1120	
Working Width (mm)	2590	2785
Working Depth (mm)	120~150	
Number of Flanges (EA)	10	11
Number of Blades (EA)	60	66
Tillage Blade Type	C Type	
Blade Shaft Speed (rpm)	156,173,191,210 / 540 rpm	
Required Power (hp)	120~130	140~160
Height of PTO Shaft (mm)	860	
Weight (kg)	1095	1140




- Up to 200 HP multi-speed gearbox (Oil gauge installed as standard)

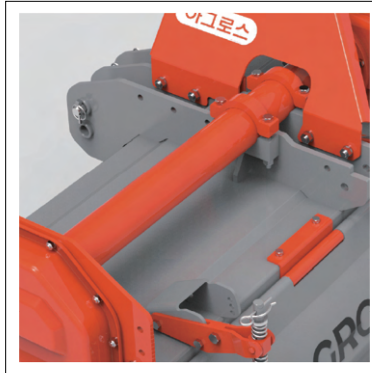


- Main deck with frame structure with high-strength double BEAM

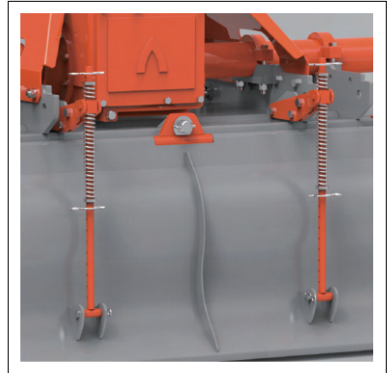


- Fixed rear cover with spring tension adjustment (Using high tensile steel plate)
- Back cover Adjustable attachment position can be changed

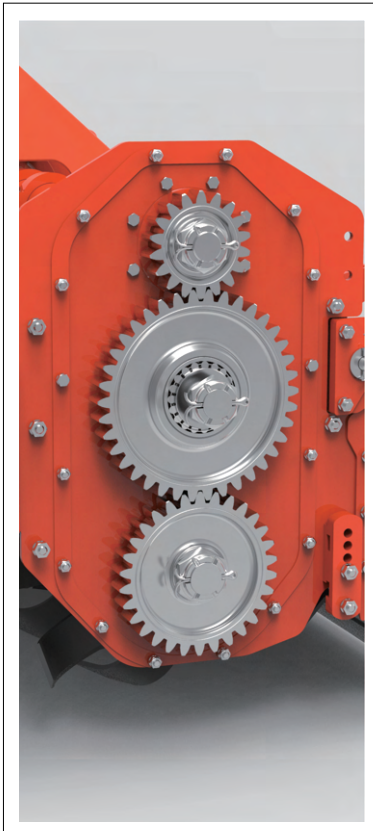

- Blade with excellent low load and soil fluidity Arrangement
- Blade with excellent low load and soil fluidity Arrangement

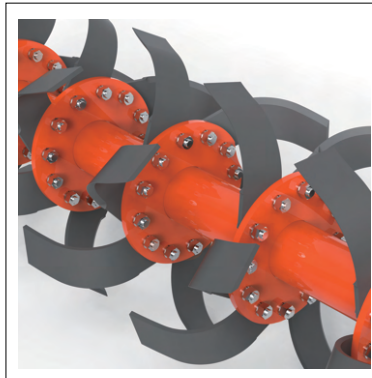

- Blade with excellent low load and soil fluidity Arrangement
- Special Material blade (Tilling blade) and blade flange (Tillage blade type: C)

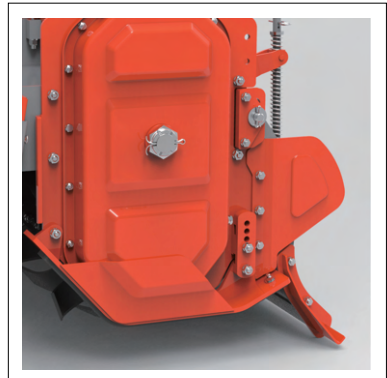

- Economical and convenient replacement type Auxiliary skid
- Use of highly durable spring steel



- Special Front mud splatter prevention rubber plate with good material flexibility
- Detachable type for easy attachment and detachment



- Versatile with sturdy structure and various mounting holes top master

## AGROS

52, Seobyeon 1-gil, Miyang-myeon, Anseong-si Gyeonggi-do, Republic of Korea

Tel: +82-31-677-7311, Fax: +82-31-677-5421

E-mail : agros@agros.co.kr

www.agros.co.kr