


# AGROS Rotary Tiller

## Extra Large size (High Position) AR8000 Series

- Premium super-large rotary tillers designed for tractors with 140–200 horsepower, featuring high-strength specifications suitable for both paddy and dry field operations
- Floating-type lower link connecting plate with shock absorption function
- Blade shaft flange made of high-strength steel and blades made of special materials




AR8310

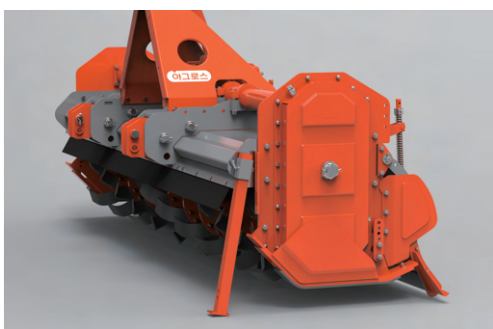

### Specifications


Model	AR8285	AR8310
Overall Width (mm)	3180	3440
Overall Height (mm)	1520	
Overall Length (mm)	1245	
Working Width (mm)	2825	3085
Working Depth (mm)	150~200	
Number of Flanges (EA)	11	12
Number of Blades (EA)	66	72
Tilling Blade Thickness	9T	
Blade Shaft Speed (rpm)	161,178,196,216 / 540 rpm	
Required Power (hp)	140~160	160~200
Height of PTO Shaft (mm)	880	
Weight (kg)	1330	1400

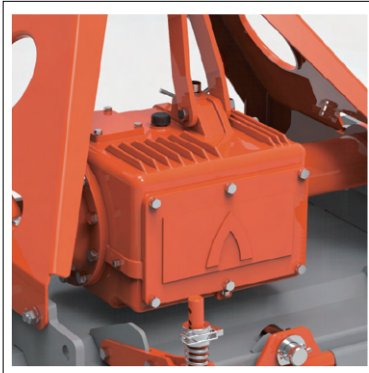

- Up to 200 HP multi-speed gearbox (Oil gauge installed as standard)




- Floating type lower link connection plate absorbs shock loads and increases aircraft stability

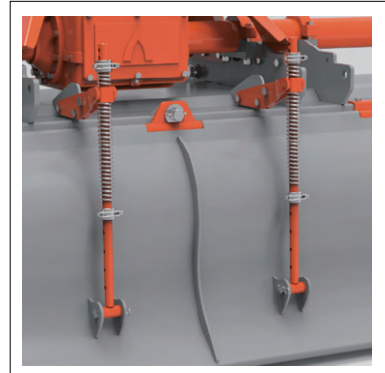


- Spring tension type back cover control bar (Sturdy ring pin fixation type)
- Back cover Adjustable attachment position can be changed




- Powerful special Geared side drive of material
- Largest gear specifications in its class
- Perfect gear fixation using special grooved nuts

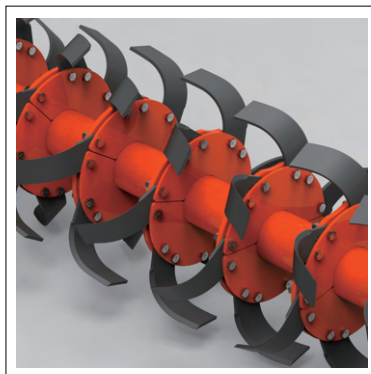

- Blade with excellent low load and soil fluidity Arrangement
- Special Material blade (Tilling blade) and blade flange (Tillage blade type: C)

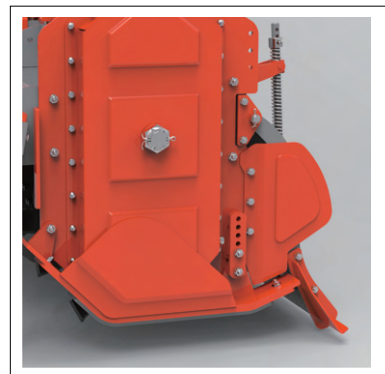

- Economical and convenient replacement type Auxiliary skid
- Use of highly durable spring steel

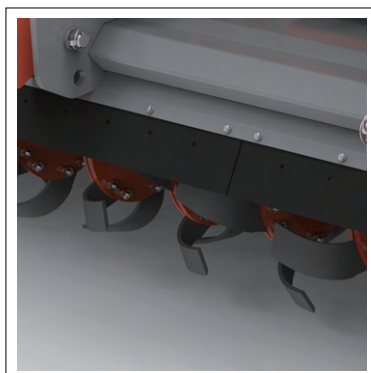

- Special Front mud splatter prevention rubber plate with good material flexibility
- Detachable type for easy attachment and detachment



- Versatile with sturdy structure and various mounting holes top master

### AGROS

52, Seobyeon 1-gil, Miyang-myeon, Anseong-si Gyeonggi-do, Republic of Korea

Tel: +82-31-677-7311, Fax: +82-31-677-5421

E-mail : agros@agros.co.kr

www.agros.co.kr