

AGROS Rotary Tiller

Small Size AR2000NC Series



- Small-sized rotary tillers suitable for both paddy and dry fields, designed for tractors with 35–55 horsepower
- Main deck structure with a frame-type design for excellent strength and durability
- High-strength pipe and special material blade flange



AR2175NC



Specifications

| Model | AR2165NC | AR2175NC |
|--------------------------|-----------------|----------|
| Overall Width (mm) | 1875 | 1980 |
| Overall Height (mm) | 1030 | |
| Overall Length (mm) | 840 | |
| Working Width (mm) | 1615 | 1730 |
| Working Depth (mm) | 120~150 | |
| Number of Flanges (EA) | 6 | 7 |
| Number of Blades (EA) | 36 | 42 |
| Tillage Blade Type | C Type | |
| Blade Shaft Speed (rpm) | 165.8 / 540 rpm | |
| Required Power (hp) | 35~40 | 40~45 |
| Height of PTO Shaft (mm) | 615 | |
| Weight (kg) | 390 | 410 |




- Up to 70HP single-speed gearbox (Oil gauge installed as standard)




- Main deck with high-strength double frame structure



- Spring tension and rolling type back cover (Using high tensile steel plate)

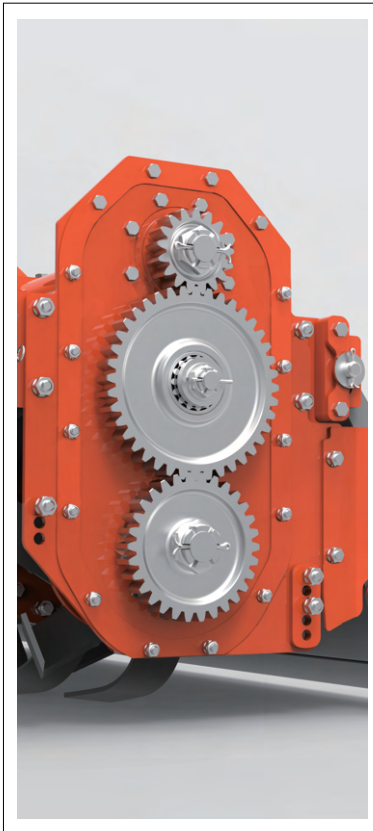

- Powerful special Geared side drive of material
- Perfect gear fixation using special grooved nuts

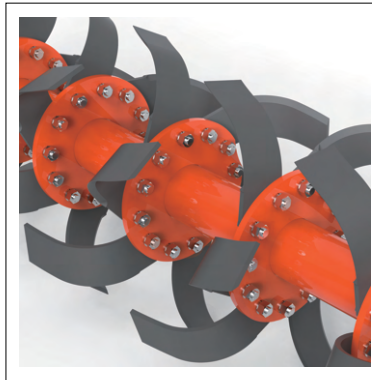

- Blade with excellent low load and soil fluidity Arrangement
- Special Material blade (Tilling blade) and blade flange (Tillage blade type: C)



- Economical and convenient replacement type Auxiliary skid
- Use of highly durable spring steel



- Special Front mud splatter prevention rubber plate with good material flexibility
- Detachable type for easy attachment and detachment



- Versatile with sturdy structure and various mounting holes top master

AGROS

52, Seobyeon 1-gil, Miyang-myeon, Anseong-si Gyeonggi-do, Republic of Korea

Tel: +82-31-677-7311, Fax: +82-31-677-5421

E-mail : agros@agros.co.kr

www.agros.co.kr